VS versatile

RAL 7040 | +65°C -20°C | MINIMUM ORDER QUANTITY: 8 PCS / MINIMO D'ORDINE: 8 PZ

GALVANIZED AND POWDER COATED STRUCTURE / STRUTTURA ZINCATA E VERNICIATA

ø 370 mm
drum/*tamburo*

optional page 94-99

INLET HOSE



ACS15



ASG15R




VCAR





4R - Optional 4-roller hose guide. Ordering the version indicating the hose reel code followed by "4R"
4R - *Guida tubo a 4 rulli opzionale. Ordinare la versione indicando il codice dell'avvolgitubo seguito da "4R"*

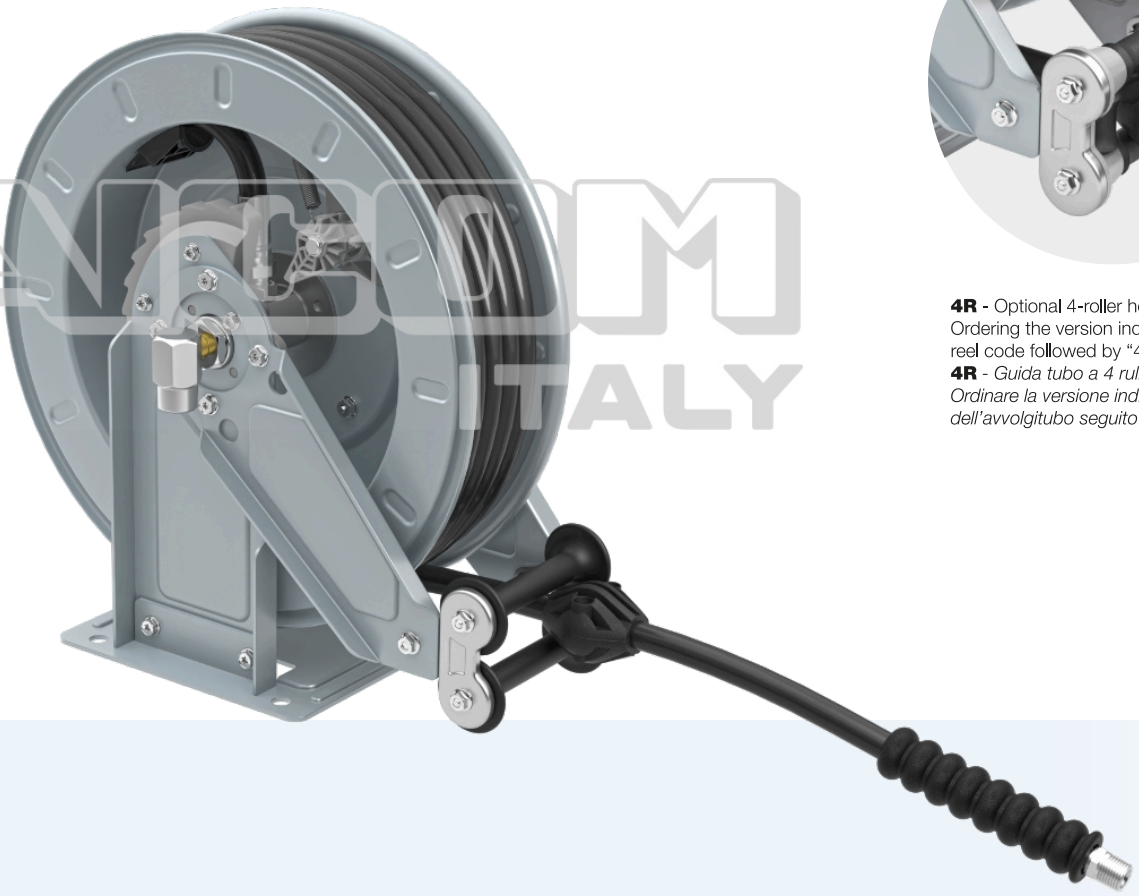

FAICOM ITALY

EN Automatic hose reels suitable for the distribution of fluids at different pressure and temperature conditions. The parts in contact with the fluid have metal details and high-quality gaskets. Hose-guide arms adjustable in three different positions according to the hose reel installation (pos. A-B-C). Optional: connection hose, lateral protective covers, revolving stand, 4-rollers hose guide, fixing bracket.


FR Enrouleurs automatiques utilisés pour distribuer des fluides à différentes pressions et températures. Composants en contact avec le fluide constitués de pièces métalliques et de joints de haute qualité. Bras guide-tuyau orientables en 3 positions différentes pour permettre l'installation souhaitée (pos. A-B-C). En option: tuyau de connexion, couvercles latéraux de protection, support pivotant, guide tuyau 4 rouleaux, contre-étrier de fixation.

DE Schlauchaufroller zur Abgabe von versch. Flüssigkeiten untersch. Betriebstemperaturen und -drücke. Teile mit Kontakt von Flüssigkeiten aus spez. Metallen und Dichtungen hoher Qualität. Schwenkbare Arme für 3 versch. Positionen (s.Abb. A-B-C). Optional: Verbindungsschlauch, seitliche Schutzverkleidungen, Schwenkkonsole, Schlauchführung mit 4 Rollen und Wandbefestigung.


ES Enrolladores automáticos preparados para distribuir fluidos con diversas condiciones de presión y temperatura. Componentes en contacto con el fluido constituidos por partes metálicas y guarniciones de alta calidad. Brazos guía manguera fijables en tres diversas posiciones para permitir la instalación deseada (pos. A-B-C). Opcional: manguera de conexión, tapas laterales de protección, soporte giratorio, guía manguera de 4 rodillos, sujeción para fijación.

IT Avvolgitubo automatici adatti per distribuire fluidi a diverse pressioni e temperature. Parti a contatto con il fluido costituite da particolari metallici e guarnizioni di elevata qualità. Bracci guidatubo orientabili in tre diverse posizioni per consentire l'installazione desiderata (pos. A-B-C). Optional: tubo di collegamento, carter laterali di protezione, supporto girevole, guidatubo a 4 rulli, controstaffa di fissaggio.


Dimensions (mm) / *Dimensioni (mm)*

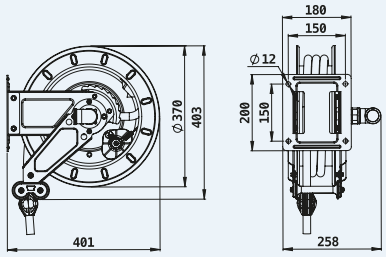


OPTIONAL ±60°

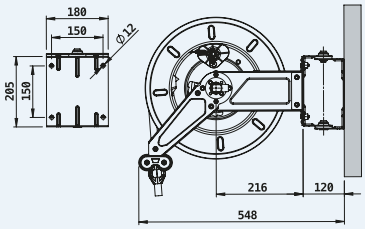


Pos. A



Pos. B



Pos. C



Standard supply
Fornitura di serie

Hose reels model VS without hose / Avvolgitubo modello VS senza tubo

Fluid Fluido	Max. pressure Pressione max.	Code Codice	Inlet (Bsp) Entrata (Gas)	Outlet (Bsp) Uscita (Gas)	◇ Capacity ◇ Capacità	Weight (kg) Peso (kg)
Diesel fuel/Gasolio	10 bar/145 psi	**VS203406STO***	1" F	Ø 19 mm	6 m/20 ft	13
Air/Aria Water/Acqua	18 bar/250 psi	**VS183815ST**	3/8" F	3/8" M	(ext. Ø14) 15 m/50ft (ext. Ø17) 10 m/32ft	13
Oil/Olio	60 bar/840 psi	**VS603810ST**	3/8" F	3/8" M	10 m/32 ft	13
		VS601210ST	1/2" F	1/2" M	10 m/32 ft	13
Grease/Grasso	400 bar/5600 psi	**VS4G1410ST**	1/4" F	1/4" M	10 m/32 ft	13
Water/Acqua 150°C	400 bar/5600 psi	**VS4H3810ST**	3/8" F	3/8" M	10 m/32 ft	13
Urea solutions	20 bar/290 psi	**VS203406ST**	Ø 19 mm	Ø 19 mm	6 m/20 ft	13

* With Brass Swivel / Con giunto in ottone
◇ Variable indicative values according to the type of hose / *Valori indicativi variabili in base alla tipologia di tubo*

Hose reels model VS with hose / Avvolgitubo modello VS con tubo

Fluid Fluido	Max. pressure Pressione max.	Code Codice	Inlet (Bsp) Entrata (Gas)	Outlet (Bsp) Uscita (Gas)	Hose diam. Tubo diam.	Hose length Lungh. Tubo	Weight (kg) Peso (kg)	Inlet hose Tubo entrata (optional)
Diesel fuel/Gasolio	10 Bar / 145 psi Rubber/Gomma R<10^6 Ohm/m	**VS101906GO**	1" F	1" M	19 x 27	6 m/20 ft	15	T1901GL
Air/Aria Water/Acqua	18 bar/250 psi Rubber/Gomma	**VS181010**	3/8" F	3/8" M	10 x 17	10 m/32 ft	15	TC10005
Oil/Olio	60 bar/3500 psi 1SC Rubber/Gomma	**VS603810**	3/8" F	3/8" M	3/8"	10 m/32 ft	16	TC38005
		VS601210	1/2" M	1/2" M	1/2"	10 m/32 ft	16	TC12005
Grease/Grasso	400 bar/5600 psi	**VS4G1410**	1/4" F	1/4" M	1/4"	10 m/32 ft	14	TC14005
Water/Acqua 150°C	250 Bar / 3500 PSI 1SC Hydro	**VS2H3810N**	3/8" F	3/8" M	3/8"	10 m/32 ft	16	TC38005H
	400 Bar / 5600 PSI 2SC Hydro	**VS4H3810**	3/8" F	3/8" M	3/8"	10 m/32 ft	16	TC38005H
Oil/Olio	Suction / Aspirazione 1SC Rubber/Gomma	**VS601207A**	1/2" M	1/2" M	1/2"	7 m/22 ft	14	TC12005
Urea solutions	0 Bar / 145 PSI EPDM	**VS101906ADB**	Ø 19 mm	Ø 19 mm	19x27	6 m/20 ft	15	Included